





133 30 40





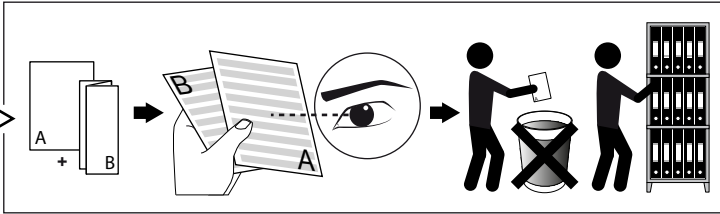


**CURRENT CONTROLLED**  
**DIMMING BY PHASE CUT-OFF DIMMER ON MAINS (10-100%)**  
**OUTPUT: 700mA-DC / 36W / 4-52V-DC**  
 $\lambda > 0,9$   
**220-240V / 50-60Hz**




**IP54**

Beschermd tegen stof - Spatwatervast  
 Protégé contre les poussières - Protégé contre les projections d'eau  
 Staubgeschützt - Geschützt gegen Spritzwasser  
 Dust-protected - Protected against splashing water  
 Protegido contra el polvo - Protegido contra salpicaduras de agua  
 Protetto contro la polvere - Protetto contro gli schizzi d'acqua



Goederen zijn dubbel geïsoleerd - geen aarding nodig  
 Les produits ont une isolation double et ne peuvent pas être mis à la terre  
 Güter sind doppelt isoliert und müssen nicht geerdet werden  
 Goods have double insulation and must not be grounded  
 Los productos tienen u aislamiento doble y no se pueden conectar a tierra  
 I prodotti possiedono un doppio isolamento e non devono essere collegati a terra

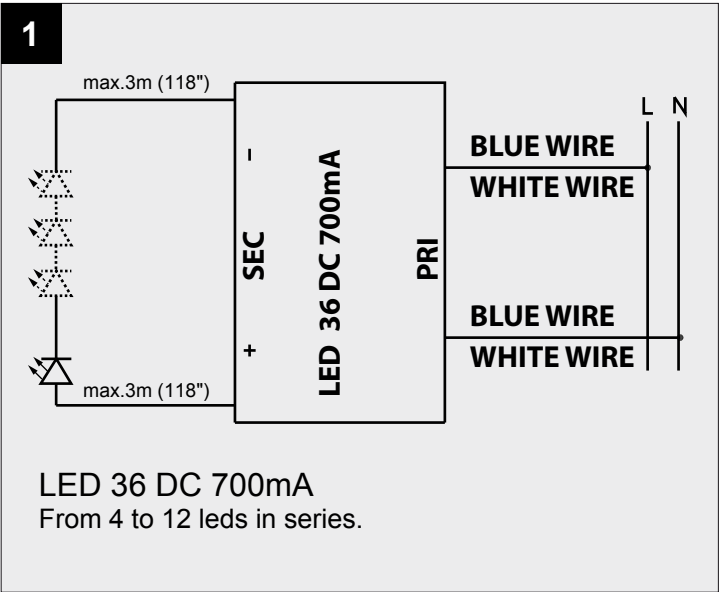

TECHNICAL DATA	
<b>INPUT</b>	
Voltage range:	220-240V
Frequency:	50-60Hz
Max.mains current:	0,2A
Power factor:	0,9
<b>OUTPUT</b>	
Voltage:	4-52V
Current:	0,2A
Rated power:	36W
<b>OPERATING CONDITIONS</b>	
Ambient temperature, TA:	-25...+70°C
Max. case temperature, TC :	+85°C
Storage temperature:	-10...+70°C
Max. relative humidity:	IP67
<b>CONNECTORS</b>	
Wire range, solid & stranded:	0,75mm <sup>2</sup> 18AWG
Wire strip length:	6-7mm
<b>MECHANICAL DATA</b>	
Dimensions:	30,5 x 133 x 40 mm
Weigth:	28g
Degree of protection:	IP54
Protection class:	Built-in class 2