

Enkel geschikt voor toestellen op zeer lage spanning (minder dan 50 V-AC / 120 V-DC)  
 Convient uniquement pour les produits à très basse tension (moins de 50 V-AC / 120 V-DC)  
 Geeignet für Güter mit sehr niedriger Spannung (unter 50 V-AC / 120 V-DC)  
 Only suited for goods at very low voltage (below 50 V-AC / 120 V-DC)  
 Se recomienda únicamente para aquellos productos de tensión muy baja (menos de 50 V-AC / 120 V-DC)  
 Vale unicamente per i prodotti a tensione molto bassa (inferiore a 50 V-AC / 120 V-DC)

**Not compatible with Class I devices and not with other companies Class III devices**

**IP20**  
 Beschermtd tegen vaste voorwerpen die groter zijn dan 12 mm  
 Protégé contre les objets solides de plus de 12 mm  
 Geschützt gegen Festkörper größer als 12 mm  
 Protected against solid objects greater than 12 mm  
 Protegido contra objetos sólidos superiores a 12 mm  
 Protetto contro oggetti solidi più grandi di 12 mm

**DTC-ON - PROFILE**

**DTC-ON - PROFILE**  
16312 0000

**DTC-ON - Corner 180°**

**DTC-ON - CORNER 180°**  
16312 0620

ACCESSORY SET  
DIN9112  
1x

**DTC-ON - PROFILE**

DEEL  
PARTIE  
TEIL  
PART  
PARTE  
PARTE

# A

**DTC-ON - Corner 90°**

**DTC-ON - CORNER 90°**  
16312 0630

ACCESSORY SET  
DIN9112  
1x

**CONNECTION**

**1**


+/-8mm

H05 - V V - U  
min. Ø 6 mm  
max. Ø 12 mm


**2**

**3**


**DTC-ON - END CAP SET**



**DTC-ON - END CAP SET**  
16312 0310

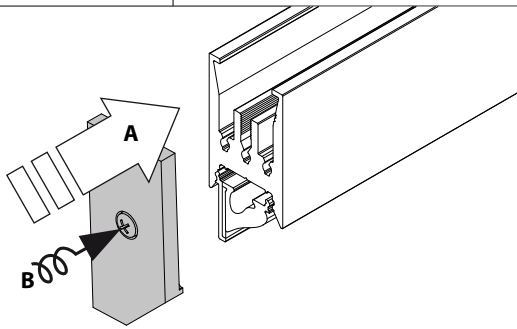


**FIXATION**



**FTL35 - FIXATION SET /**  
**CORNER 180°**  
391 06 11

**1**

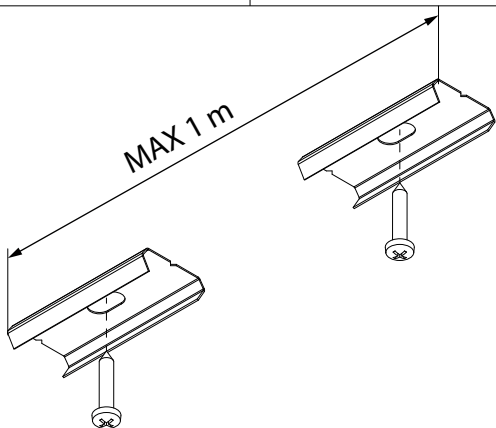

**2**

