


M26L - TWEETER DIM5


DEEL
PARTIE
TEIL
PART
PARTE
PARTE **A**

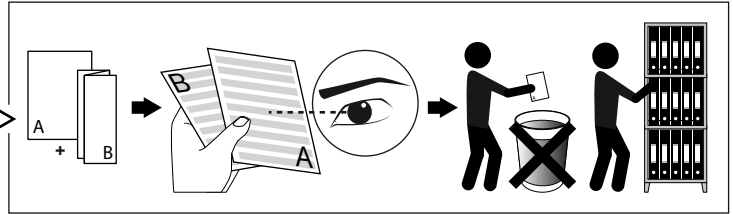


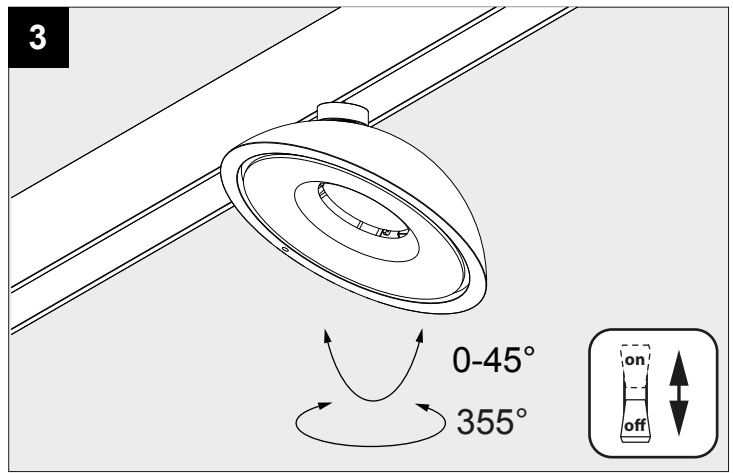
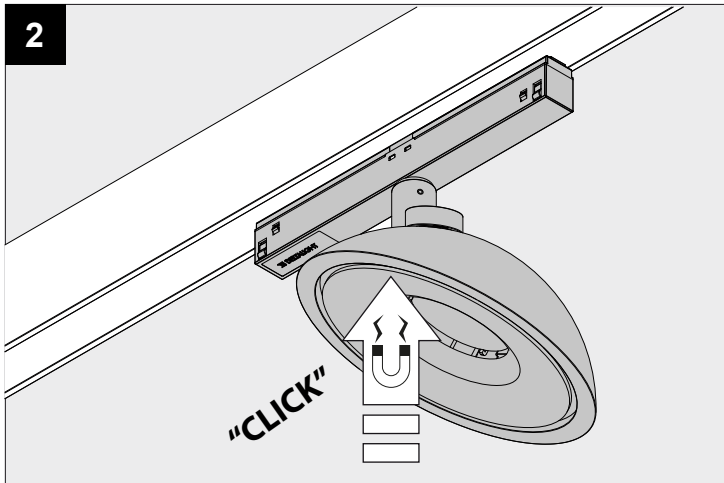
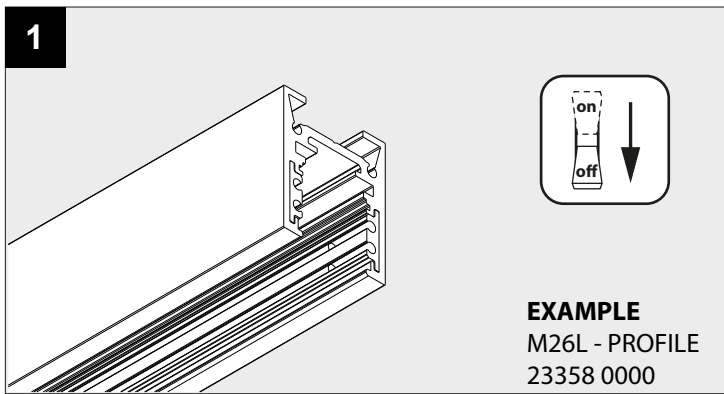
REQUIRED	SLM26L - PROFILE (MAX 200W) 23358 00X0
OPTIONAL	MODULATOR 48V-DC / DIM9 300 90 011

ACCESSORIES	
TWEETER CLIP	201 03 00
HONEYCOMB 40	201 03 01
LINEAR SPREAD LENS 40	201 03 02
SPREAD LENS 40	201 03 03
SOFTENING LENS 40	201 03 04
GLASS SBL 40	201 03 05




DALI DIMMING	
U	48V-DC
P ₀	10,4W

 **IP20**
 Beschermd tegen vaste voorwerpen die groter zijn dan 12 mm
 Protégé contre les objets solides de plus de 12 mm
 Geschützt gegen Festkörper größer als 12 mm
 Protected against solid objects greater than 12 mm
 Protegido contra objetos sólidos superiores a 12 mm
 Protetto contro oggetti solidi più grandi di 12 mm

 Enkel geschikt voor toestellen op zeer lage spanning (minder dan 50 V-AC / 120 V-DC)
 Convient uniquement pour les produits à très basse tension (moins de 50 V-AC / 120 V-DC)
 Geeignet für Güter mit sehr niedriger Spannung (unter 50 V-AC / 120 V-DC)
 Only suited for goods at very low voltage (below 50 V-AC / 120 V-DC)
 Se recomienda únicamente para aquellos productos de tensión muy baja (menos de 50 V-AC / 120 V-DC)
 Vale unicamente per i prodotti a tensione molto bassa (inferiore a 50 V-AC / 120 V-DC)



ACCESSORIES

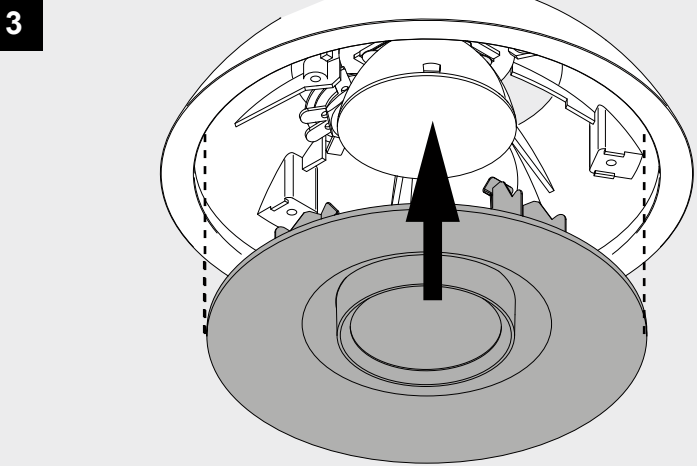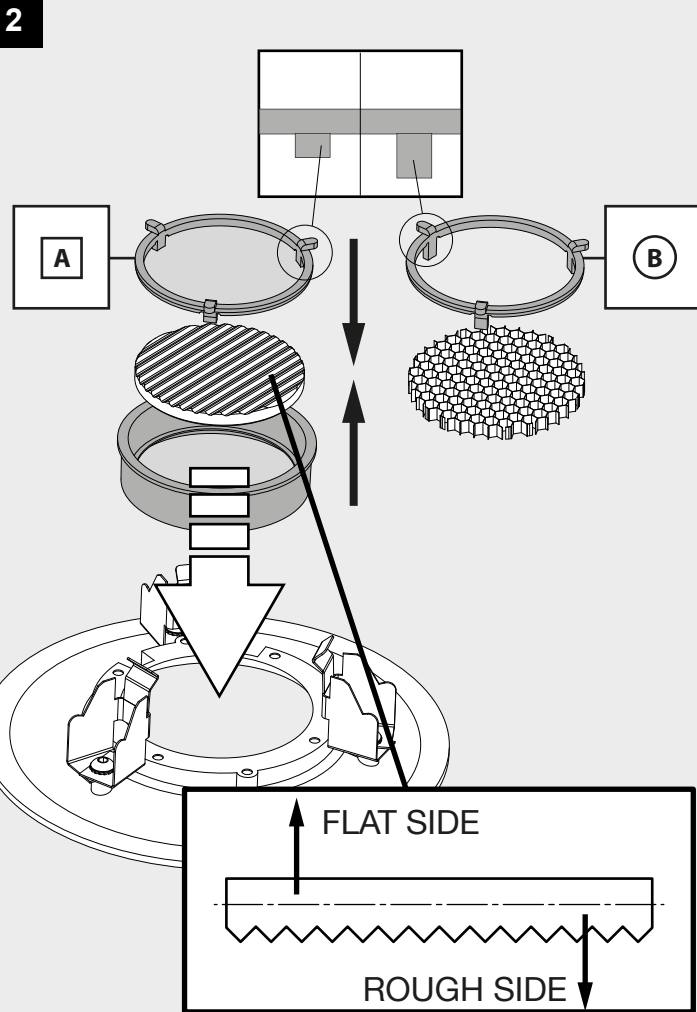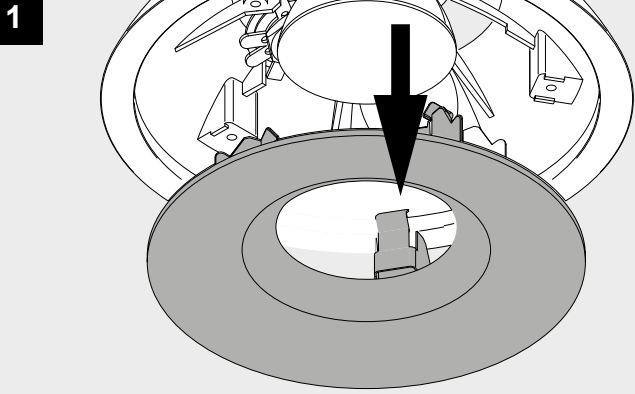

MOVE THE LUMINAIRE

