

# BORDERLINE


The Borderline enables you to frame the room with light using LED, creating a contemporary and atmospheric look and feel. This profile can be used for both wall and ceiling application, and features a remarkable but easy-to-install trimless finish. An indirect lighting solution with exceptional architectural detail.

[www.deltalight.com/borderline](http://www.deltalight.com/borderline)



1

PROFILE CONSTRUCTION

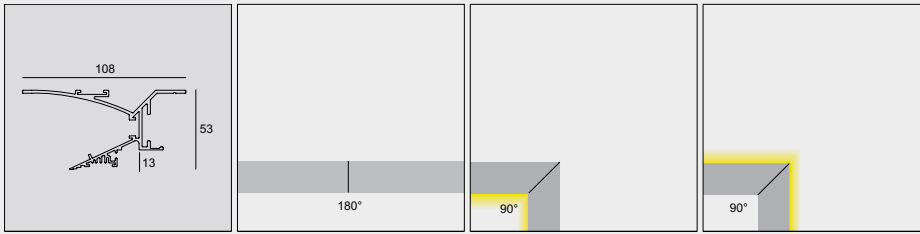


<b>BL - PROFILE</b>	<b>BL - CORNER 180°</b>	<b>BL - CORNER 90° INT</b>	<b>BL - CORNER 90° EXT</b>
<b>371 00 00 ◊</b>	<b>371 06 01</b>	<b>371 06 06</b>	<b>371 06 16</b>

◊ W	0,3	0,3	0,3
MAX.L / PROFILE: 6m			
1,5 / m			

2

PROFILE FIXATION

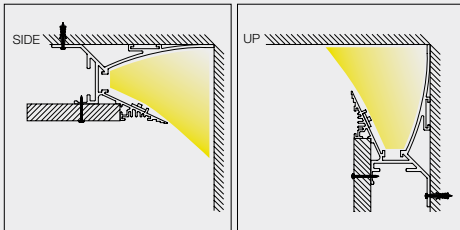

PRO

3

PROFILE CONNECTION

4

LIGHT MODULES



LEDFLEX IN & OUT

SUITABLE FOR  
LEDFLEX IN & OUT  
PAG PRO 820

SUITABLE FOR ALL PROFILES FROM PAGE PRO 746-749 & PRO 768-819  
 NO LEDFLEX OUT FOR: FEMTOLINE W D/U, KASKADE (LEDFLEX IN MAX 15W/M) AND DOT.COM WALLWASH TR

**LEDFLEX**



5m - 24V-DC MOUNTED

0,3

	WHITE			<b>NEW</b> TW	<b>NEW</b> RGB
	Dividable per 100mm 70 smd LED/m	Dividable per 50mm 140 smd LED/m	Dividable per 33,3mm 180 smd LED/m	Dividable per 100mm 60 smd LED/m	
	5,1W/m 650lm/m	15,1W/m 1400lm/m	21,6W/m 2100lm/m	14,4W/m 1350lm/m	14,4W/m
CRI > 90	LEDFLEX	LEDFLEX FP	LEDFLEX HP*	LEDFLEX TW	LEDFLEX RGB
<b>4000K</b> ●					
<b>IN</b>	300 91 52 94	300 91 53 94	300 91 54 94		
<b>OUT (IP65)</b>	300 91 62 94	300 91 63 94			
<b>3000K</b> ●					
<b>IN</b>	300 91 52 93	300 91 53 93	300 91 54 93		
<b>OUT (IP65)</b>	300 91 62 93	300 91 63 93			
<b>2700K</b> ●					
<b>IN</b>	300 91 52 92	300 91 53 92	300 91 54 92		
<b>OUT (IP65)</b>	300 91 62 92	300 91 63 92			
<b>2700K</b> ● ▶ <b>5700K</b> ●					
<b>IN</b>				21031 0010	
<b>OUT (IP65)</b>					
<b>RGB</b> ●					
<b>IN</b>					300 91 53 33
<b>OUT (IP65)</b>					300 91 63 33

**LED POWER SUPPLY / INFO PAG TEC**

<b>24V-DC / 20W</b> 300 89 24 20 OPTIONS 24V-DC / 4A DIM UNIT	max.4m	max.1m	max.0,9m	max.1,3m	max.1,3m *
<b>24V-DC / 40W</b> 300 89 24 40 OPTIONS 24V-DC / 4A DIM UNIT	max.8m	max.2,5m	max.1,8m	max.2,7m	max.2,7m *
<b>24V-DC / 60W</b> 300 89 24 60 OPTIONS 24V-DC / 4A DIM UNIT	max.12m	max.4m (max.3m / POWERLINE)	max.2,7m (max.3m / POWERLINE)	max.4,1m	max.4m *
<b>24V-DC / 80W DIM1</b> 300 89 24 80 ED1	max.16m	max.5m (max.3m / POWERLINE)	max.3,6m (max.3m / POWERLINE)		
<b>24V-DC / 150W</b> 300 89 24 150 OPTIONS 24V-DC / 4A DIM UNIT	max.30m	max.10m (max.3m / POWERLINE)	max.6,8m (max.3m / POWERLINE)	max.10,4m	max.10m *
<b>MULTI POWER DIM7</b> 300 90 64	max.4m	max.1,3m	max.0,9m		
<b>MULTI POWER DIM6</b> 300 90 61	max.4m	max.1,3m	max.0,9m		

**RGB DRIVER / INFO PAG TEC**

<b>12/24V-DC 75/150W</b> 300 90 331				*use in combination with Led Power Supply 24V-DC	*use in combination with Led Power Supply 24V-DC
--	--	--	--	--	--


**TOUCH CONTROLLER / INFO PAG TEC**

<b>TW DMX</b> 300 90 332				*use in combination with RGB DRIVER	
<b>RGB DMX</b> 300 90 330					*use in combination with RGB DRIVER

**OPTIONS**

24V-DC / 4A DIM1 UNIT ▶ **300 90 003 ED1**  
 24V-DC / 4A DIM5 UNIT ▶ **300 90 003 ED5**  
 24V-DC / 2x 4A WIRELESS DIM UNIT ▶ **300 90 010**

**DIM 1** DIMMING BY 1-10V  
**DIM 6** DIMMING BY PUSH BUTTON / FALLING EDGE DIMMER  
**DIM 7** DIMMING BY PUSH BUTTON / 1-10V





NINA MAYA INTERIORS - PHOTOGRAPHY NICOLE ENGLAND



WWW.SAAI.CO