


MICROLINE TR


A series of slim, recessed led profiles, available for either downwards or sideways installation. Thanks to the perforated trim on both sides of the profile, trimless installation is made easy. The TR version can be used in either ceiling or wall, while the TRW version is especially made for installation in corners between wall and ceiling. To reduce glare, Microline TRW+ offers a solution with the SBL plexi mounted deeper into the profile.

www.deltalight.com/microlinetrिमless

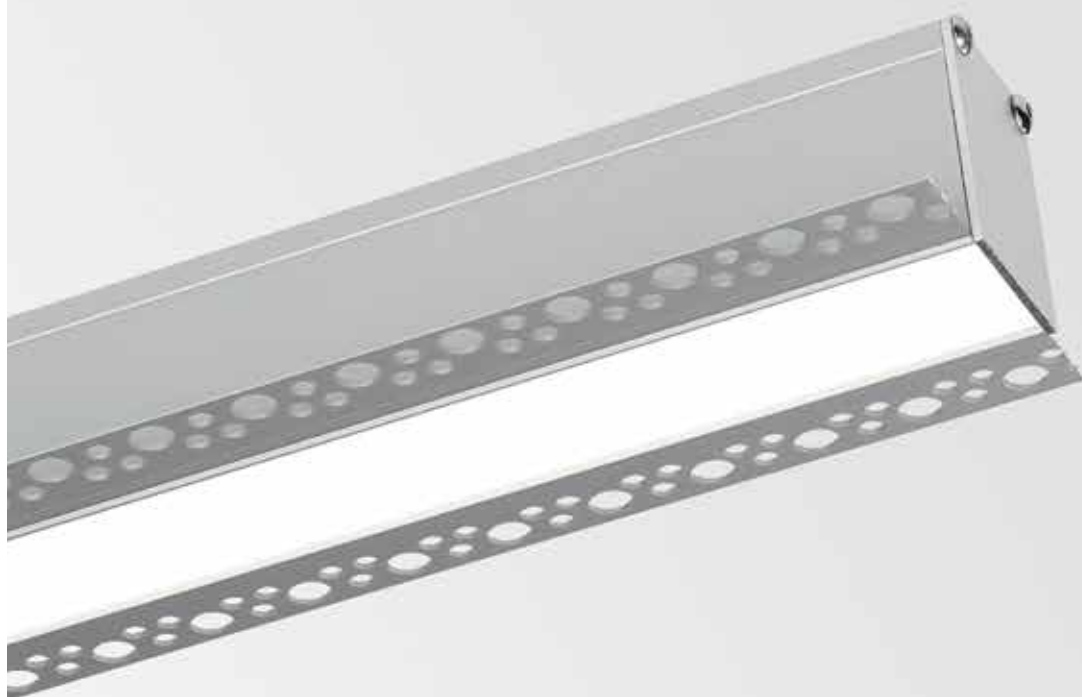

1

PROFILE CONSTRUCTION

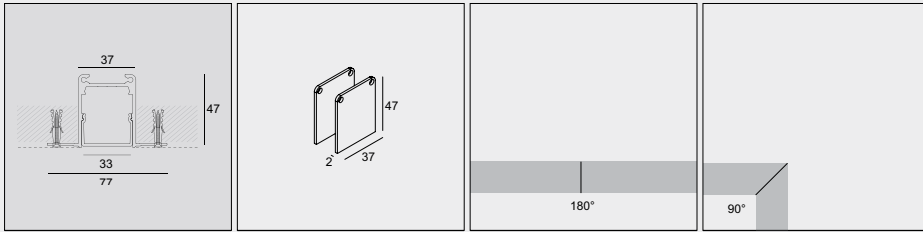


MIC TR - PROFILE	MIC TR/TRW - END CAP SET	MIC TR - CORNER 180°	MIC TR - CORNER 90°
394 00 00 ◊	394 03 01 ◊	394 06 01	394 06 06
◊ ANO INCL. PC SBL MAX. L / PROFILE: 6m 10 / m	◊ ANO SET OF 2 PCS 01	0,3	0,3

PRO

2

PROFILE FIXATION



FIXATION
39 x L

3

PROFILE CONNECTION

4

LIGHT MODULES



LEDFLEX IN & OUT
SUITABLE FOR LEDFLEX IN & OUT PAG PRO 820

SUITABLE FOR ALL PROFILES FROM PAGE PRO 746-749 & PRO 768-819
 NO LEDFLEX OUT FOR: FEMTOLINE W D/U, KASKADE (LEDFLEX IN MAX 15W/M) AND DOT.COM WALLWASH TR

LEDFLEX



5m - 24V-DC MOUNTED

0,3

	WHITE			NEW TW	NEW RGB
	Dividable per 100mm 70 smd LED/m	Dividable per 50mm 140 smd LED/m	Dividable per 33,3mm 180 smd LED/m	Dividable per 100mm 60 smd LED/m	
	5,1W/m 650lm/m	15,1W/m 1400lm/m	21,6W/m 2100lm/m	14,4W/m 1350lm/m	14,4W/m
CRI > 90	LEDFLEX	LEDFLEX FP	LEDFLEX HP*	LEDFLEX TW	LEDFLEX RGB
4000K ●					
IN	300 91 52 94	300 91 53 94	300 91 54 94		
OUT (IP65)	300 91 62 94	300 91 63 94			
3000K ●					
IN	300 91 52 93	300 91 53 93	300 91 54 93		
OUT (IP65)	300 91 62 93	300 91 63 93			
2700K ●					
IN	300 91 52 92	300 91 53 92	300 91 54 92		
OUT (IP65)	300 91 62 92	300 91 63 92			
2700K ● ▶ 5700K ●					
IN				21031 0010	
OUT (IP65)					
RGB ●					
IN					300 91 53 33
OUT (IP65)					300 91 63 33

LED POWER SUPPLY / INFO PAG TEC

24V-DC / 20W 300 89 24 20 OPTIONS 24V-DC / 4A DIM UNIT	max.4m	max.1m	max.0,9m	max.1,3m	max.1,3m *
24V-DC / 40W 300 89 24 40 OPTIONS 24V-DC / 4A DIM UNIT	max.8m	max.2,5m	max.1,8m	max.2,7m	max.2,7m *
24V-DC / 60W 300 89 24 60 OPTIONS 24V-DC / 4A DIM UNIT	max.12m	max.4m (max.3m / POWERLINE)	max.2,7m (max.3m / POWERLINE)	max.4,1m	max.4m *
24V-DC / 80W DIM1 300 89 24 80 ED1	max.16m	max.5m (max.3m / POWERLINE)	max.3,6m (max.3m / POWERLINE)		
24V-DC / 150W 300 89 24 150 OPTIONS 24V-DC / 4A DIM UNIT	max.30m	max.10m (max.3m / POWERLINE)	max.6,8m (max.3m / POWERLINE)	max.10,4m	max.10m *
MULTI POWER DIM7 300 90 64	max.4m	max.1,3m	max.0,9m		
MULTI POWER DIM6 300 90 61	max.4m	max.1,3m	max.0,9m		

RGB DRIVER / INFO PAG TEC

12/24V-DC 75/150W 300 90 331				*use in combination with Led Power Supply 24V-DC	*use in combination with Led Power Supply 24V-DC
--	--	--	--	--	--

TOUCH CONTROLLER / INFO PAG TEC

TW DMX 300 90 332				*use in combination with RGB DRIVER	
RGB DMX 300 90 330					*use in combination with RGB DRIVER

OPTIONS

24V-DC / 4A DIM1 UNIT ▶ **300 90 003 ED1**
 24V-DC / 4A DIM5 UNIT ▶ **300 90 003 ED5**
 24V-DC / 2x 4A WIRELESS DIM UNIT ▶ **300 90 010**

DIM 1 DIMMING BY 1-10V
DIM 6 DIMMING BY PUSH BUTTON / FALLING EDGE DIMMER
DIM 7 DIMMING BY PUSH BUTTON / 1-10V

