


ONE AND ONLY


A peculiar profile, both functional as decorative. The design of the body allows you to have up to 5 lines of light out of 1 profile, 3 for direct and 2 for indirect lighting. The soft glow of the light along the sides of the profile makes the One-And-Only float through the air, a powerful blend of light for an eye-catching look.

PRO

www.deltalight.com/one-and-only-profile



1 PROFILE CONSTRUCTION

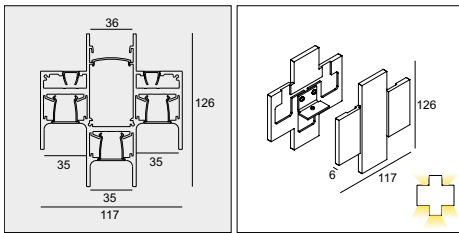

OAO - PROFILE

404 00 00 ◊

◊ B / GC / W

INCL. PC SBL HE
MAX. L / PROFILE: 5m

◊ 5,3 / m

OAO - END CAP SET


404 03 01 ◊

◊ B / W

SET OF 2 PCS

◊ 0,4

2 PROFILE FIXATION




OAO - CABLE SUSPENSION SINGLE 1,6

404 09 01

L 1,6m

◊ 0,1

OPTIONS
SUSPENSION ST
► 15225 0340 B / W



OAO - ROD SUSPENSION 0,4m

328 27 40 ◊

◊ B / W

◊ 0,1

EXCL. CABLING

OAO - ROD SUSPENSION 0,8m


328 27 80 ◊

◊ B / W

◊ 0,1

EXCL. CABLING

3 PROFILE CONNECTION




LED POWER SUPPLY 24V-DC KIT 60W DIM1

404 24 60 ED1

220-240V / 50-60Hz

◊ 0,1 IP20



CURRENT SUPPLY L1,5m

377 98 51 - 3 x 0,75mm²

377 99 51 - 5 x 0,75mm²

LED POWER SUPPLY 24V-DC KIT 100W

404 24 100

220-240V / 50-60Hz

◊ 0,1 IP20


CURRENT SUPPLY L6,0m

377 98 56 - 3 x 0,75mm²

377 99 56 - 5 x 0,75mm²

OPTIONS
CONNECTION ST ► 15225 0360 B / W
CABLE BASE R ► 203 99 55 ANO / B / W
CABLE BASE S ► 203 99 56 ANO / B / W
COVERSET R 62-90-100 / S 62-80-90

4 LIGHT MODULES



5m - 24V-DC

MOUNTED

◊ 0,3

WHITE

Dividable per
33,3mm
210 smd LED/m

10W/m
1045lm/m

CRI > 90

LED FLEX IN MP

4000K

IN

21031 0140

3000K

IN

21031 0120

2700K

IN

21031 0110

NEW

LED POWER SUPPLY 24V-DC / INFO PAG TEC 26 (max. 5m/powerline)

24W / IP20 NON DIMMABLE 21012 0160	max. 2,4m
150W / IP67 NON DIMMABLE 300 89 24 150	max. 15m
60W / IP20 DIM1 (0-10V) 21012 0171	max. 6m
90W / IP20 DIM1 (0-10V) 21012 0181	max. 9m
120W / IP20 DIM1 (0-10V) 21012 0191	max. 12m
60W / IP67 DIM1 (0-10V) 21012 0101	max. 6m
90W / IP67 DIM1 (0-10V) 21012 0111	max. 9m
120W / IP67 DIM1 (0-10V) 21012 0121	max. 12m
60W / IP20 DIM5 (DALI DIM) 21012 0205	max. 6m
100W / IP20 DIM5 (DALI DIM) 21012 0225	max. 10m
60W / IP67 DIM5 (DALI DIM) 21012 0135	max. 6m
90W / IP67 DIM5 (DALI DIM) 21012 0145	max. 9m
120W / IP67 DIM5 (DALI DIM) 21012 0155	max. 12m

DIM1 DIMMING BY 1-10V
DIM5 DIMMING DALI

PRO

