

RENDEZ-VOUS

The Rendez-vous is an anodized profile for LEDflex solutions. It is designed as a skirting-board profile, but can also be installed invisibly into the wall or ceiling.


A lighting rendez-vous where floor or ceiling meets the wall.

www.deltalight.com/rendez-vous.



1

PROFILE CONSTRUCTION

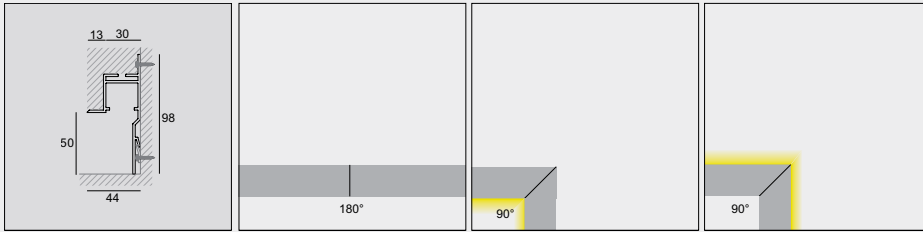

RV - PROFILE

333 00 00 ◊

◊ ANO

MAX.L / PROFILE: 6m

1,1 / m

RV - CORNER 180°

333 06 01

0,3

RV - CORNER 90° INT

333 06 06

0,3


RV - CORNER 90° EXT

333 06 16

0,3

2

PROFILE FIXATION

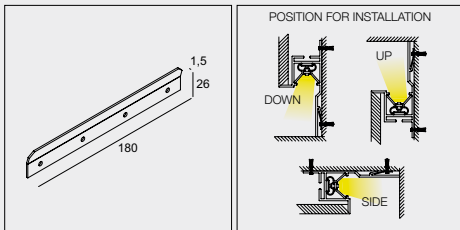

RV - WALL FIXATION

333 06 10

PRO

3

PROFILE CONNECTION

4

LIGHT MODULES



LED FLEX IN & OUT

SUITABLE FOR
LED FLEX IN & OUT
PAG PRO 820

SUITABLE FOR ALL PROFILES FROM PAGE PRO 746-749 & PRO 768-819
 NO LEDFLEX OUT FOR: FEMTOLINE W D/U, KASKADE (LEDFLEX IN MAX 15W/M) AND DOT.COM WALLWASH TR

LEDFLEX



5m - 24V-DC MOUNTED

0,3

| | WHITE | | | NEW TW | NEW RGB |
|---------------------------------|-------------------------------------|-------------------------------------|---------------------------------------|-------------------------------------|----------------|
| | Dividable per 100mm 70 smd LED/m | Dividable per 50mm 140 smd LED/m | Dividable per 33,3mm 180 smd LED/m | Dividable per 100mm 60 smd LED/m | |
| | 5,1W/m 650lm/m | 15,1W/m 1400lm/m | 21,6W/m 2100lm/m | 14,4W/m 1350lm/m | 14,4W/m |
| CRI > 90 | LEDFLEX | LEDFLEX FP | LEDFLEX HP* | LEDFLEX TW | LEDFLEX RGB |
| 4000K ● | | | | | |
| IN | 300 91 52 94 | 300 91 53 94 | 300 91 54 94 | | |
| OUT (IP65) | 300 91 62 94 | 300 91 63 94 | | | |
| 3000K ● | | | | | |
| IN | 300 91 52 93 | 300 91 53 93 | 300 91 54 93 | | |
| OUT (IP65) | 300 91 62 93 | 300 91 63 93 | | | |
| 2700K ● | | | | | |
| IN | 300 91 52 92 | 300 91 53 92 | 300 91 54 92 | | |
| OUT (IP65) | 300 91 62 92 | 300 91 63 92 | | | |
| 2700K ● ▶ 5700K ● | | | | | |
| IN | | | | 21031 0010 | |
| OUT (IP65) | | | | | |
| RGB ● | | | | | |
| IN | | | | | 300 91 53 33 |
| OUT (IP65) | | | | | 300 91 63 33 |

LED POWER SUPPLY / INFO PAG TEC

| | | | | | |
|---|---------|---------------------------------|----------------------------------|-----------|------------|
| 24V-DC / 20W 300 89 24 20 OPTIONS 24V-DC / 4A DIM UNIT | max.4m | max.1m | max.0,9m | max.1,3m | max.1,3m * |
| 24V-DC / 40W 300 89 24 40 OPTIONS 24V-DC / 4A DIM UNIT | max.8m | max.2,5m | max.1,8m | max.2,7m | max.2,7m * |
| 24V-DC / 60W 300 89 24 60 OPTIONS 24V-DC / 4A DIM UNIT | max.12m | max.4m (max.3m / POWERLINE) | max.2,7m (max.3m / POWERLINE) | max.4,1m | max.4m * |
| 24V-DC / 80W DIM1 300 89 24 80 ED1 | max.16m | max.5m (max.3m / POWERLINE) | max.3,6m (max.3m / POWERLINE) | | |
| 24V-DC / 150W 300 89 24 150 OPTIONS 24V-DC / 4A DIM UNIT | max.30m | max.10m (max.3m / POWERLINE) | max.6,8m (max.3m / POWERLINE) | max.10,4m | max.10m * |
| MULTI POWER DIM7 300 90 64 | max.4m | max.1,3m | max.0,9m | | |
| MULTI POWER DIM6 300 90 61 | max.4m | max.1,3m | max.0,9m | | |

RGB DRIVER / INFO PAG TEC

| | | | | | |
|--|--|--|--|--|--|
| 12/24V-DC 75/150W 300 90 331 | | | | *use in combination with Led Power Supply 24V-DC | *use in combination with Led Power Supply 24V-DC |
|--|--|--|--|--|--|

TOUCH CONTROLLER / INFO PAG TEC

| | | | | | |
|------------------------------|--|--|--|-------------------------------------|-------------------------------------|
| TW DMX 300 90 332 | | | | *use in combination with RGB DRIVER | |
| RGB DMX 300 90 330 | | | | | *use in combination with RGB DRIVER |

OPTIONS

24V-DC / 4A DIM1 UNIT ▶ **300 90 003 ED1**
 24V-DC / 4A DIM5 UNIT ▶ **300 90 003 ED5**
 24V-DC / 2x 4A WIRELESS DIM UNIT ▶ **300 90 010**

DIM 1 DIMMING BY 1-10V
DIM 6 DIMMING BY PUSH BUTTON / FALLING EDGE DIMMER
DIM 7 DIMMING BY PUSH BUTTON / 1-10V

