




CONFORM P14 PDS DOWN-UP 953067 B-MMAT

26514 7320 B-MMAT

AVAILABLE IN
BLACK-BLACK 26514 7320 B-B
BLACK-GOLD MATT 26514 7320 B-MMAT
WHITE-BLACK 26514 7320 W-B

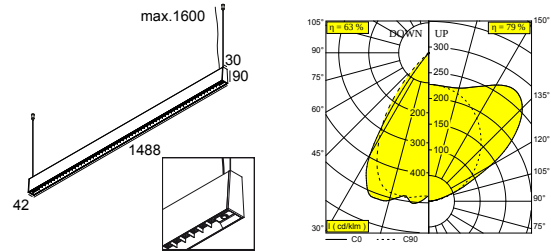

[View on website](#)

General info	
LOCATION	indoor
INSTALLATION	Ceiling Suspended
INGRESS PROTECTION	IP20
WEIGHT (KG)	4.4
ADJUSTABILITY	non adjustable
INFORMATION	60 x REFLECTOR FL-67° (DOWN) INCL.DIMMABLE LED POWER SUPPLY 650mA-DC DOWN / 500mA-DC UP INCL.PRESENCE & DAYLIGHT SENSOR INCL.2 x CABLE SUSPENSION SINGLE AUTO. 1,6m INCL.1 x CABLE 3 x 0.75mm ² NATURAL LIGHT TECHNOLOGY
Electrical info	
ELECTRICAL	220-240V / 0 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	non-dimmable
ENERGY CLASS	D
CERTIFICATES	CB, ENEC, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	DOWN: LED cluster 22W / CRI>95 (R9: 80) / 3000K / 2568lm UP: LED cluster 16,8W / CRI>95 (R9: 80) / 3000K / 1978lm
TM-30 VALUES	Rf: 94 / Rg: 103
SDCM	SDCM3
RISKGROUP	RG2
LM80	L80 > 60000
LED TECHNICS (LIGHT SOURCE)	DOWN: 2568lm // 22W // 117lm/W UP: 1978lm // 16,8W // 117lm/W
LED TECHNICS (LUMINAIRE)	DOWN: 1613lm // 25W // 64lm/W UP: 1559lm // 19W // 81lm/W

CONFORM P14 PDS DOWN-UP 953067 B-MMAT

26514 7320 B-MMAT

Options

CABLE BASE R / S

COVERSET R 62-90-100 / S 62-80-90

CONNECTION ST / CONNECTION TRIMLESS

SUSPENSION ST / SUSPENSION TRIMLESS


For detailed installation instructions, please consult the manual: [26514_XXX0_HAND.pdf](#)

CONFORM P14 PDS DOWN-UP 953067 B-MMAT

26514 7320 B-MMAT

FINISH YOUR SPECIFICATION

Current supply



203 99 55 ANO CABLE BASE R ANO

203 99 55 B CABLE BASE R B

203 99 55 W CABLE BASE R W




203 99 56 ANO CABLE BASE S ANO

203 99 56 B CABLE BASE S B

203 99 56 W CABLE BASE S W

Coversets




204 00 100 B COVERSET R 100 B

204 00 100 W COVERSET R 100 W

CONFORM P14 PDS DOWN-UP 953067 B-MMAT


26514 7320 B-MMAT

Suspension parts



328 10 01

SUSPENSION TRIMLESS O.F.A.




15225 0340 B

SUSPENSION ST B

15225 0340 W

SUSPENSION ST W

Electric connection parts



328 10 03

CONNECTION TRIMLESS O.F.A.




15225 0360 B

CONNECTION ST B

15225 0360 W


CONNECTION ST W

Other



26510 0010

PDS REMOTE CONTROL



26510 0020

PDS SENSOR PROGRAMMER



CONFORM P14 PDS DOWN-UP 953067 B-MMAT

26514 7320 B-MMAT

Notes: