



CONFORM P14 PDS DOWN-UP 953067


26514 7320 B-FG

AVAILABLE IN

BLACK-BLACK 26514 7320 B-B

BLACK-FLEMISH GOLD 26514 7320 B-FG

WHITE-BLACK 26514 7320 W-B

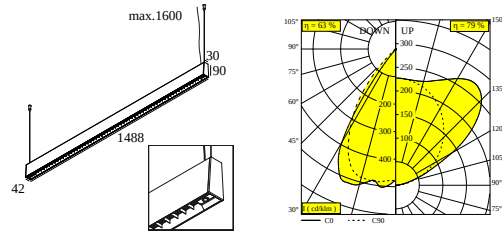

 [View on website](#)



General info

LOCATION	indoor
INSTALLATION	Ceiling Suspended
INGRESS PROTECTION	IP20
WEIGHT (KG)	4,4
ADJUSTABILITY	non adjustable
INFORMATION	60 x REFLECTOR FL-67° (DOWN) INCL.DIMMABLE LED POWER SUPPLY 650mA-DC DOWN / 500mA-DC UP INCL.PRESENCE & DAYLIGHT SENSOR INCL.2 x CABLE SUSPENSION SINGLE AUTO. 1,6m INCL.1 x CABLE 3 x 0,75mm ² NATURAL LIGHT TECHNOLOGY

Electrical info

ELECTRICAL	220-240V / 0 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	non-dimmable
ENERGY CLASS	D
CERTIFICATES	CB, ENEC, RCM

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	DOWN: LED cluster 22W / CRI>95 (R9: 80) / 3000K / 2568lm UP: LED cluster 16,8W / CRI>95 (R9: 80) / 3000K / 1978lm
TM-30 VALUES	Rf: 94 / Rg: 103
SDCM	SDCM3
RISKGROUPE	RG2
LM80	L80 > 60000
BEAMANGLE	67°
LED TECHNICS (LIGHT SOURCE)	DOWN: 2568lm // 22W // 117lm/W UP: 1978lm // 16,8W // 117lm/W
LED TECHNICS (LUMINAIRE)	DOWN: 1613lm // 25,3W // 64lm/W UP: 1559lm // 19,3W // 81lm/W

Options

- CABLE BASE R / S
- COVERSET R 62-90-100 / S 62-80-90
- CONNECTION ST / CONNECTION TRIMLESS
- SUSPENSION ST / SUSPENSION TRIMLESS

DELTALIGHT

CONFORM P14 PDS DOWN-UP 953067

26514 7320 B-FG

For detailed installation instructions, please consult the manual : [26514_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Current supply



203 99 55 ANO CABLE BASE R ANO

203 99 55 B CABLE BASE R B

203 99 55 W CABLE BASE R W




203 99 56 ANO CABLE BASE S ANO

203 99 56 B CABLE BASE S B

203 99 56 W CABLE BASE S W

Coversets



204 00 62 ANO COVERSET R 62 ANO

204 00 62 B COVERSET R 62 B

204 00 62 W COVERSET R 62 W



204 00 90 ANO COVERSET R 90 ANO

DELTALIGHT

CONFORM P14 PDS DOWN-UP 953067

26514 7320 B-FG

204 00 90 B COVERSET R 90 B

204 00 90 W COVERSET R 90 W



204 00 100 ANO COVERSET R 100 ANO

204 00 100 B COVERSET R 100 B

204 00 100 W COVERSET R 100 W



204 62 62 ANO COVERSET S 62 ANO

204 62 62 B COVERSET S 62 B

204 62 62 W COVERSET S 62 W



204 80 80 ANO COVERSET S 80 ANO

204 80 80 B COVERSET S 80 B

204 80 80 W COVERSET S 80 W



204 90 90 ANO COVERSET S 90 ANO

204 90 90 B COVERSET S 90 B


204 90 90 W COVERSET S 90 W

DELTALIGHT

CONFORM P14 PDS DOWN-UP 953067


26514 7320 B-FG

Suspension parts



328 10 01 SUSPENSION TRIMLESS O.F.A.

Cutout dimension (mm): 62 (CONCRETE: 102)




15225 0340 B SUSPENSION ST B

Cutout dimension (mm): 27

15225 0340 W SUSPENSION ST W

Electric connection parts



328 10 03 CONNECTION TRIMLESS O.F.A.

Cutout dimension (mm): 62 (CONCRETE: 102)




15225 0360 B CONNECTION ST B


Cutout dimension (mm): 43

15225 0360 W CONNECTION ST W

Other



26510 0010 PDS REMOTE CONTROL



26510 0020 PDS SENSOR PROGRAMMER

DELTALIGHT

CONFORM P14 PDS DOWN-UP 953067

26514 7320 B-FG

Notes: