

DOT.COM M4 TRIMLESS 92749


424 512 04 923 FG

AVAILABLE IN

BLACK 424 512 04 923 B

CHROMED 424 512 04 923 C

FLEMISH GOLD 424 512 04 923 FG

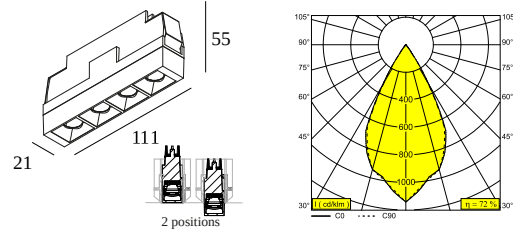

 [View on website](#)



General info

| | |
|-------------------------------|---|
| LOCATION | indoor |
| INSTALLATION | Ceiling Recessed |
| CUTOUT SHAPE/SIZE (MM) | rectangle - KIT |
| RECESSED DEPTH (MM) | 60 |
| INGRESS PROTECTION | IP20 |
| WEIGHT (KG) | 0.2 |
| ADJUSTABILITY | non adjustable |
| INFORMATION | 4 x REFLECTOR WFL-49° EXCL.LED POWER SUPPLY 500mA-DC |

Electrical info

| | |
|---------------------|---------------------------|
| CLASS | III |
| DIM TYPE | depending on power supply |
| ENERGY CLASS | E |
| CERTIFICATES | EAC, LCA |

Lightsource info

| | |
|------------------------------------|--|
| LIGHTSOURCE NAME | LED |
| LIGHTSOURCE | LED cluster 5,7W / CRI>90 (R9: 50) / 2700K / 631lm |
| TM-30 VALUES | Rf: 92 / Rg: 100 |
| SDCM | SDCM3 |
| RISKGROUP | RG2 |
| LM80 | L80 > 60000 |
| BEAMANGLE | 49° |
| LED TECHNICS (LIGHT SOURCE) | 631lm // 5,7W // 111lm/W |
| LED TECHNICS (LUMINAIRE) | 454lm // 6,6W // 69lm/W |

Requirements

MOUNTING KIT DOT.COM M4 TRIMLESS
LED POWER SUPPLY 500mA-DC DIM (Remote)














For detailed installation instructions, please consult the manual : [424_512_04_XXX_HAND.pdf](#)

DELTALIGHT

DOT.COM M4 TRIMLESS 92749

424 512 04 923 FG

CEILING COMPATIBILITY

| Ceiling Type | Mounting Kit | |
|--|--|----------|
|  Plasterboard |  424 512 04 00 - MOUNTING KIT DOT.COM M4 TRIMLESS | Required |
|  Stucanet |  424 512 04 00 - MOUNTING KIT DOT.COM M4 TRIMLESS | Required |
|  Concrete + plaster |  424 512 04 00 - MOUNTING KIT DOT.COM M4 TRIMLESS | Required |
|  Lintel + plaster |  424 512 04 00 - MOUNTING KIT DOT.COM M4 TRIMLESS | Required |
|  Hollow-core slab + plaster |  424 512 04 00 - MOUNTING KIT DOT.COM M4 TRIMLESS | Required |
|  Stretched ceiling |  15212 0180 - MOUNTING KIT DOT.COM M4 TRIMLESS WSC | Required |
| |  15212 0110 - MOUNTING KIT DOT.COM M4 TRIMLESS CSC | Required |

FINISH YOUR SPECIFICATION


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1

3

Dimtype: 1-10V

Cutout dimension (mm): 30




300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

3

Dimtype: DALI

Cutout dimension (mm): 45




300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL

3

Dimtype: non-dimmable

Cutout dimension (mm): 30



300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL

3


Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 45

DELTALIGHT

DOT.COM M4 TRIMLESS 92749

424 512 04 923 FG




300 90 61 LED POWER SUPPLY MULTI-POWER DIM6

4

Dimtype: mains (phase cut-off) or push button

Cutout dimension (mm): 56




300 90 63 LED POWER SUPPLY MULTI-POWER DIM9

6(6)

Dimtype: 1-10V or DALI or push button

Cutout dimension (mm): 82




300 90 64 LED POWER SUPPLY MULTI-POWER DIM7

4(2)

Dimtype: 1-10V or push button

Cutout dimension (mm): 72




300 90 68 LED POWER SUPPLY MULTI-POWER DIM5

4(2)

Dimtype: DALI

Cutout dimension (mm): 72



300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9

9(7)

Dimtype: 1-10V or DALI or push button

Cutout dimension (mm): 84



300 90 124 LED POWER SUPPLY MULTI-POWER DIM7

3(2)

Dimtype: 1-10V or push button

Cutout dimension (mm): 55




300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5

3(2)

Dimtype: DALI

Cutout dimension (mm): 55




300 90 135 LED POWER SUPPLY MULTI-POWER HV

3->7

Dimtype: non-dimmable

Cutout dimension (mm): 90




21012 0010 LED POWER SUPPLY MULTI POWER

3

Dimtype: non-dimmable

Cutout dimension (mm): 50



21012 0021 LED POWER SUPPLY MULTI POWER DIM1

4


Dimtype: 1-10V

Cutout dimension (mm): 54

DELTALIGHT

DOT.COM M4 TRIMLESS 92749

424 512 04 923 FG




21012 0035 LED POWER SUPPLY MULTI POWER DIM5

4

Dimtype: DALI

Cutout dimension (mm): 54




21012 004W LED POWER SUPPLY MULTI-POWER WDL

6(6)

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 84




21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL

4

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 54




21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8

2->2

Dimtype: mains (phase cut-off)

Cutout dimension (mm): 55




21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8

3->4

Dimtype: mains (phase cut-off)

Cutout dimension (mm): 55




21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8

3

Dimtype: mains (phase cut-off)

Cutout dimension (mm): 48




21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

3

Dimtype: DALI

Cutout dimension (mm): 30

Mounting kits



424 512 04 00 MOUNTING KIT DOT.COM M4 TRIMLESS


Cutout dimension (mm): 127 x 36

DELTALIGHT


DOT.COM M4 TRIMLESS 92749

424 512 04 923 FG

Mounting kits stretched ceiling



15212 0110 MOUNTING KIT DOT.COM M4 TRIMLESS CSC



15212 0180 MOUNTING KIT DOT.COM M4 TRIMLESS WSC



Notes: