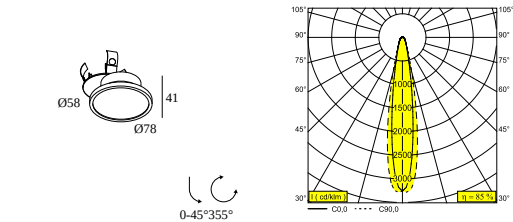




HALOSCAN CLIP MP SOFT 93014

23118 9010 W

AVAILABLE IN
BLACK 23118 9010 B
WHITE 23118 9010 W



 [View on website](#)



General info

LOCATION	indoor
INSTALLATION	Ceiling Semi-recessed
CUTOUT SHAPE/SIZE (MM)	round - 51
RECESSED DEPTH (MM)	40
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° to 45° swiveling, 355° rotatable
INFORMATION	LENS SP-14° EXCL.DIMMABLE LED POWER SUPPLY 350mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, ENEC

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 6W / CRI>90 (R9: 50) / 3000K-1800K / 623lm
TM-30 VALUES	Rf: 90 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	14°
LED TECHNICS (LIGHT SOURCE)	623lm // 6W // 105lm/W
LED TECHNICS (LUMINAIRE)	532lm // 6,9W // 77lm/W

Requirements

LED POWER SUPPLY 350mA-DC DIM

Options

MOUNTING KIT FLUSH SPY

Accessories

HALOSCAN HONEYCOMB
HALOSCAN LINEAR SPREAD LENS
HALOSCAN KAP MP

DELTALIGHT

HALOSCAN CLIP MP SOFT 93014

23118 9010 W


For detailed installation instructions, please consult the manual : [23118_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	 414 90 01 - MOUNTING KIT FLUSH SPY Required
 Plasterboard	 414 90 01 - MOUNTING KIT FLUSH SPY Required
 Stucanet	 414 90 01 - MOUNTING KIT FLUSH SPY Required
 Wood	-
 Concrete	-
 Concrete + plaster	 414 90 01 - MOUNTING KIT FLUSH SPY Required
 Lintel + plaster	 414 90 01 - MOUNTING KIT FLUSH SPY Required
 Hollow-core slab	-
 Hollow-core slab + plaster	 414 90 01 - MOUNTING KIT FLUSH SPY Required
 Stretched ceiling	-

FINISH YOUR SPECIFICATION











LED power supplies	# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the 'I' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.	Min current Max current

	300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1	2 ☐
Dimtype: 1-10V		
Cutout dimension (mm): 30		

DELTALIGHT

HALOSCAN CLIP MP SOFT 93014










23118 9010 W

	300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	2	☐
	Dimtype: DALI		
	Cutout dimension (mm): 45		
	300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL	2	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 30		
	300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL	2	☐
	Dimtype: WDL = wireless dimmable		
	Cutout dimension (mm): 45		
	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6	2	☐
	Dimtype: mains (phase cut-off) or push button		
	Cutout dimension (mm): 56		
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	4(4)	☐
	Dimtype: 1-10V or DALI or push button		
	Cutout dimension (mm): 82		
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7	3(2)	☐
	Dimtype: 1-10V or push button		
	Cutout dimension (mm): 72		
	300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9	2	☐
	Dimtype: 1-10V or DALI or push button		
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	2(2)	☐
	Dimtype: DALI		
	Cutout dimension (mm): 72		
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	2->6(6)	☐
	Dimtype: 1-10V or DALI or push button		
	Cutout dimension (mm): 84		
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	2(2)	☐
	Dimtype: 1-10V or push button		
	Cutout dimension (mm): 55		

DELTALIGHT

HALOSCAN CLIP MP SOFT 93014

23118 9010 W


	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	2(2) ☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	3 ☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	3 ☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 84	4(4) ☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 54	3 ☐
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 50	2->2 ☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 48	2 ☐
	21012 0308 LED POWER SUPPLY 350mA / 7,35W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 40	1 ☐
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5 Dimtype: DALI Cutout dimension (mm): 30	2 ☐

DELTALIGHT

HALOSCAN CLIP MP SOFT 93014

23118 9010 W

Mounting kits




414 90 01 MOUNTING KIT FLUSH SPY

Cutout dimension (mm): 83


☐

Light altering devices




23110 0040 HALOSCAN LINEAR SPREAD LENS

☐



23110 0050 B HALOSCAN HONEYCOMB B

☐



23110 0060 B HALOSCAN KAP MP B

☐

23110 0060 W HALOSCAN KAP MP W

☐

Notes: