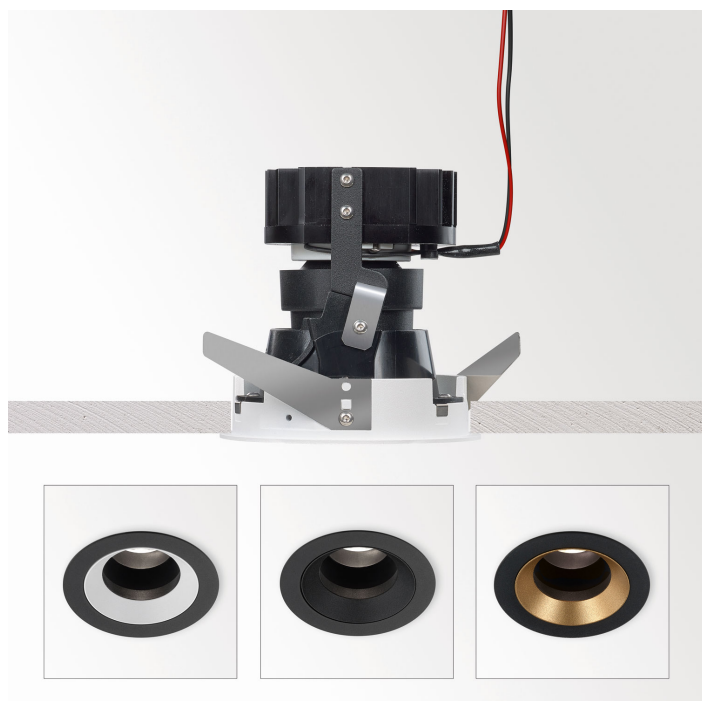






iMAX II ROUND ADJUSTABLE LP 93020

24210 9320 B

AVAILABLE IN
BLACK 24210 9320 B
WHITE 24210 9320 W



[View on website](#)



General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 98
RECESSED DEPTH (MM)	125
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20 or IP54 (with TUBE IP)
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	LENS FL-20° EXCLLED POWER SUPPLY 350-500mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, EAC, ENEC

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8-8,6W / CRI>90 (R9: 52) / 3000K / 734-1018lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUPE	RG1
LM80	L90B10 > 50000
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	1018lm // 8,6W // 118lm/W
LED TECHNICS (LUMINAIRE)	800lm // 9,9W // 81lm/W

Requirements

iMAX II TUBE ROUND
 LED POWER SUPPLY 350 / 500mA-DC DIM

Accessories

iMAX II ACCESSOIRES

For detailed installation instructions, please consult the manual : [24210_XXXX_HAND.pdf](#)

DELTALIGHT

iMAX II ROUND ADJUSTABLE LP 93020


24210 9320 B

CEILING COMPATIBILITY



Ceiling Type	Mounting Kit	
 System ceiling	 15215 0010 - MOUNTING KIT FLUSH iMAX II ROUND	Required
 Plasterboard	 15215 0010 - MOUNTING KIT FLUSH iMAX II ROUND	Required
 Stucanet	 15215 0010 - MOUNTING KIT FLUSH iMAX II ROUND	Required
 Wood	-	
 Stretched ceiling	-	

FINISH YOUR SPECIFICATION

Emergency units











	21032 0270 B EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER B	☐
	21032 0270 W EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER W	☐

LED power supplies

LED power supplies		# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the 'I' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
	300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1 Dimtype: 1-10V Cutout dimension (mm): 30	2 ☐
	300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5 Dimtype: DALI Cutout dimension (mm): 45	2 ☐











iMAX II ROUND ADJUSTABLE LP 93020

24210 9320 B

	300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL	2	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 30		
	300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL	2	☐
	Dimtype: WDL = wireless dimmable		
	Cutout dimension (mm): 45		
	300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1	2	☐
	Dimtype: 1-10V		
	Cutout dimension (mm): 30		
	300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	2	☐
	Dimtype: DALI		
	Cutout dimension (mm): 45		
	300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL	2	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 30		
	300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL	2	☐
	Dimtype: WDL = wireless dimmable		
	Cutout dimension (mm): 45		
	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6	2 2	☐
	Dimtype: mains (phase cut-off) or push button		
	Cutout dimension (mm): 56		
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	4(4) 4(4)	☐
	Dimtype: 1-10V or DALI or push button		
	Cutout dimension (mm): 82		
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7	3(2) 2(1)	☐
	Dimtype: 1-10V or push button		
	Cutout dimension (mm): 72		
	300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9	2 -	☐
	Dimtype: 1-10V or DALI or push button		











iMAX II ROUND ADJUSTABLE LP 93020

24210 9320 B

	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5 Dimtype: DALI Cutout dimension (mm): 72	2(2) 2(1)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 84	2->6(6) 6(4)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 55	2(2) 2(1)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	2(2) 2(1)	☐
	300 90 135 LED POWER SUPPLY MULTI-POWER HV Dimtype: non-dimmable Cutout dimension (mm): 90	3->4 2->4	☐
	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non-dimmable Cutout dimension (mm): 50	2 2	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	3 3	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	3 3	☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 84	4(4) 4(3)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 54	3 3	☐

iMAX II ROUND ADJUSTABLE LP 93020


24210 9320 B

	21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 50	1	☐
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 50	2->2	☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	1	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	2->3	☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 48	2 2	☐
	21012 0308 LED POWER SUPPLY 350mA / 7,35W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 40	1	☐
	21012 0318 LED POWER SUPPLY 500mA / 10W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 40	1	☐
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68 Dimtype: non-dimmable Cutout dimension (mm): 60	2(2)	☐
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68 Dimtype: non-dimmable Cutout dimension (mm): 60	2(1)	☐
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5 Dimtype: DALI Cutout dimension (mm): 30	2	☐

DELTALIGHT

iMAX II ROUND ADJUSTABLE LP 93020





24210 9320 B

	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	2	☐
Dimtype: DALI			
Cutout dimension (mm): 30			

Mounting kits

	15215 0010 MOUNTING KIT FLUSH iMAX II ROUND		☐
Cutout dimension (mm): 121			

Light altering devices



	24213 0050 B iMAX II HONEYCOMB B		☐
	24213 0060 iMAX II GLASS SBL		☐
	24213 0070 iMAX II LINEAR SPREAD LENS		☐
	24213 0090 iMAX II SOFTENING LENS		☐
	24213 0100 iMAX II SPREAD LENS		☐

DELTALIGHT

iMAX II ROUND ADJUSTABLE LP 93020

24210 9320 B

Finish your product

	<u>24213 0010 B</u>	iMAX II TUBE ROUND B	☐
	<u>24213 0010 FG</u>	iMAX II TUBE ROUND FG	☐
	<u>24213 0010 MMAT</u>	iMAX II TUBE ROUND MMAT	☐
	<u>24213 0010 W</u>	iMAX II TUBE ROUND W	☐
	<u>24213 0040 B</u>	iMAX II TUBE ROUND IP B	☐
	<u>24213 0040 FG</u>	iMAX II TUBE ROUND IP FG	☐
	<u>24213 0040 MMAT</u>	iMAX II TUBE ROUND IP MMAT	☐
	<u>24213 0040 W</u>	iMAX II TUBE ROUND IP W	☐

Notes: