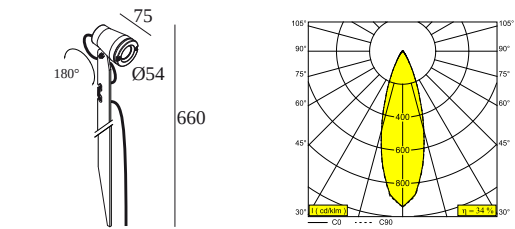




KIX M PIN 24V 93033

13530 9330 A

AVAILABLE IN
ALU GREY 13530 9330 A
ANTHRACITE 13530 9330 N
PINE GREEN 13530 9330 PGR



 [View on website](#)



General info	
LOCATION	outdoor
INSTALLATION	Floor Surface mounted
INGRESS PROTECTION	IP55
PROTECTION AGAINST MECHANICAL IMPACT	IK03
WEIGHT (KG)	0.6
ADJUSTABILITY	0° to 90° swiveling
INFORMATION	LENS FL-30° INCL.1 x CABLE H05 RN-F 2 x 1 mm² 2m EXCL.LED POWER SUPPLY 24V-DC (non-dimmable or dimmable with PWM output) INCL.KAP STRIPER B (removable)

Electrical info	
ELECTRICAL	24V-DC
CLASS	III
DIM TYPE	non-dimmable
ENERGY CLASS	F







Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 6,4W / CRI>90 / 3000K / 587lm
SDCM	SDCM2
RISKGROUP	RG1
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	587lm // 6,4W // 92lm/W
LED TECHNICS (LUMINAIRE)	199lm // 7,4W // 27lm/W

Requirements	
LED POWER SUPPLY 24V-DC	

Options	
CBOX	
IP68 CONNECTION KIT	
IP68 CONNECTOR 3P	

For detailed installation instructions, please consult the manual : [13530_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION



LED power supplies		# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
 300 89 24 150 LED POWER SUPPLY 24V-DC / 150W	Dimtype: non-dimmable Cutout dimension (mm): 75	19
 21012 0160 LED POWER SUPPLY 24V-DC / 24W	Dimtype: non-dimmable Cutout dimension (mm): 55	3
 21012 0171 LED POWER SUPPLY 24V-DC / 60W DIM1	Dimtype: 1-10V Cutout dimension (mm): 61	7
 21012 0181 LED POWER SUPPLY 24V-DC / 90W DIM1	Dimtype: 1-10V Cutout dimension (mm): 70	11
 21012 0191 LED POWER SUPPLY 24V-DC / 120W DIM1	Dimtype: 1-10V Cutout dimension (mm): 70	15
Miscellaneous control equipment		
 21032 0320 AMBIENT LIGHT SENSOR AND 24V DIMMER (PWM)		

DELTALIGHT

KIX M PIN 24V 93033

13530 9330 A

Waterproof connection parts

	216 12 00 CBOX	☐
Cutout dimension (mm): 142 x 142		
	216 12 01 IP68 CONNECTION KIT	☐
	216 12 02 IP68 CONNECTOR 3P	☐

Notes: