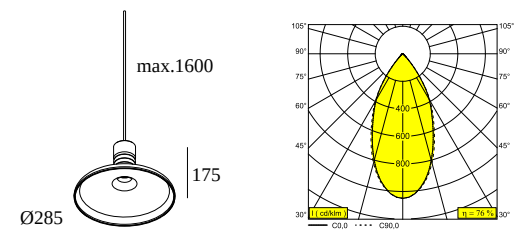




MILES C2 SMOKE 92750

23931 9230



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Suspended
INGRESS PROTECTION	IP20
WEIGHT (KG)	1.3
ADJUSTABILITY	non adjustable
INFORMATION	REFLECTOR WFL-50° INCL.1 x CABLE 2 x 0.75mm² 1,6m INCL.1 x CABLE CLAMP BLACK EXCL.LED POWER SUPPLY 350mA-DC

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	D
CERTIFICATES	CB, EAC, ENEC

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8W / CRI>90 (R9: 60) / 2700K / 753lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	50°
LED TECHNICS (LIGHT SOURCE)	753lm // 5,8W // 129lm/W
LED TECHNICS (LUMINAIRE)	571lm // 6,7W // 86lm/W

Requirements	
LED POWER SUPPLY 350mA-DC DIM	
MILES POWERBOX 350mA DIM8	

Options	
CONNECTION TRIMLESS	
CEILING BASE R	
MILES CEILING BASE 3L / 3R	

Accessories	
MILES TUBE	

For detailed installation instructions, please consult the manual : [23931_9230_HAND.pdf](#)

FINISH YOUR SPECIFICATION

LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1

Dimtype: 1-10V

Cutout dimension (mm): 30

1



300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

Dimtype: DALI

Cutout dimension (mm): 45

1



300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL

Dimtype: non-dimmable

Cutout dimension (mm): 30

1




300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 45

1




300 90 61 LED POWER SUPPLY MULTI-POWER DIM6

Dimtype: mains (phase cut-off) or push button

Cutout dimension (mm): 56

2




300 90 63 LED POWER SUPPLY MULTI-POWER DIM9

Dimtype: 1-10V or DALI or push button

Cutout dimension (mm): 82

4(4)



300 90 64 LED POWER SUPPLY MULTI-POWER DIM7

Dimtype: 1-10V or push button











Cutout dimension (mm): 72

2(1)

DELTALIGHT

MILES C2 SMOKE 92750





23931 9230

	300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9 Dimtype: 1-10V or DALI or push button	2 ☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5 Dimtype: DALI Cutout dimension (mm): 72	2(2) ☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 84	2->6(6) ☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 55	3(2) ☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	2(2) ☐
	300 90 135 LED POWER SUPPLY MULTI-POWER HV Dimtype: non-dimmable Cutout dimension (mm): 90	3->3 ☐
	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non-dimmable Cutout dimension (mm): 50	2 ☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	3 ☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	3 ☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 84	3(3) ☐

DELTALIGHT

MILES C2 SMOKE 92750

23931 9230


	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	3	☐
Dimtype: WDL = wireless dimmable			
Cutout dimension (mm): 54			
	21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8	1	☐
Dimtype: mains (phase cut-off)			
Cutout dimension (mm): 50			
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	2	☐
Dimtype: mains (phase cut-off)			
Cutout dimension (mm): 48			
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68	2(2)	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 60			
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	2	☐
Dimtype: DALI			
Cutout dimension (mm): 30			

Power box


of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current

	23942 0018 B MILES POWERBOX 350 mA DIM8 B	1	☐
Dimtype: mains (phase cut-off)			

Electric connection parts


	328 10 03 CONNECTION TRIMLESS O.F.A.	☐
Cutout dimension (mm): 62 (CONCRETE: 102)		

DELTALIGHT




MILES C2 SMOKE 92750

23931 9230

Decorative ornaments

	23944 0010 B MILES TUBE B	☐
	23944 0010 M MILES TUBE M	☐

Ceiling bases

	23943 0010 B CEILING BASE R B	☐
	23945 0010 B CEILING BASE 3L B	☐
	23945 0020 B CEILING BASE 3R B	☐

Notes: