

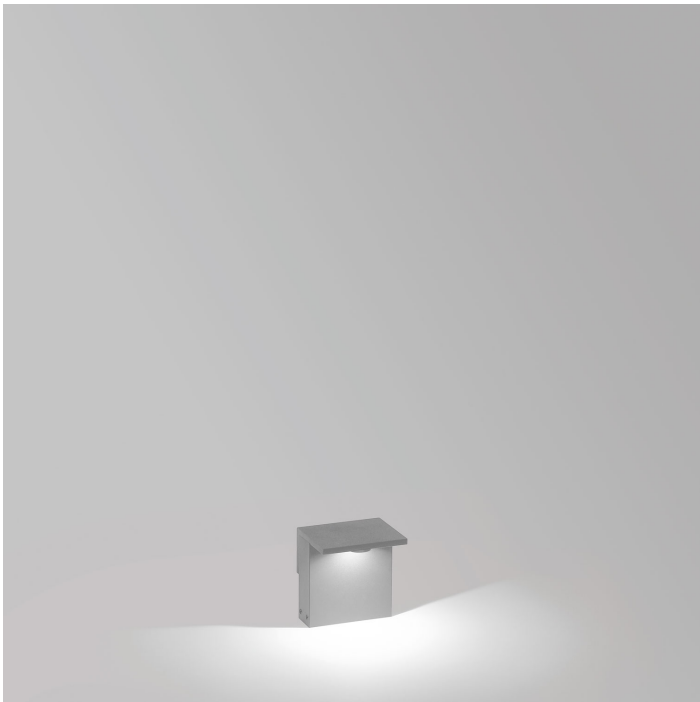




OBLIX 15 930

15118 9300 A

AVAILABLE IN
ALU GREY 15118 9300 A
ANTHRACITE 15118 9300 N



 [View on website](#)




General info	
LOCATION	outdoor
INSTALLATION	Floor Surface mounted
INGRESS PROTECTION	IP55
PROTECTION AGAINST MECHANICAL IMPACT	IK03
WEIGHT (KG)	1.7
ADJUSTABILITY	non adjustable
INFORMATION	INCL.LED POWER SUPPLY 350mA-DC
Electrical info	
ELECTRICAL	120-240V / 50-60Hz
CLASS	II
POWER SUPPLY	YES
DIM TYPE	non-dimmable
ENERGY CLASS	D
CERTIFICATES	CB, EAC, ENEC, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8W / CRI>90 (R9: 52) / 3000K / 787lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	787lm // 5,8W // 135lm/W
LED TECHNICS (LUMINAIRE)	573lm // 6,7W // 86lm/W
Options	

- PLATE 7
- PIN 12
- CBOX
- IP68 CONNECTION KIT
- IP68 CONNECTOR 3P

For detailed installation instructions, please consult the manual : [15118_XXXX_HAND.pdf](#)

FINISH YOUR SPECIFICATION


Waterproof connection parts



216 12 00 CBOX

☐

Cutout dimension (mm): 142 x 142




216 12 01 IP68 CONNECTION KIT

☐


216 12 02 IP68 CONNECTOR 3P

☐

Pins and plates for bollards



229 01 12 PIN 12

☐

229 02 07 PLATE 7

☐

Notes: