




SPY FOCUS MP 930 ADM DIM5

19875 9305 FW

AVAILABLE IN
BLACK 19875 9305 B
FULL WHITE 19875 9305 FW
WHITE 19875 9305 W

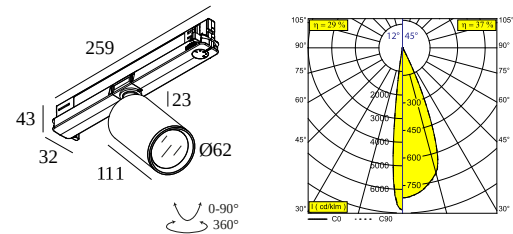

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Mains voltage track Mains voltage track mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.6
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	ADJUSTABLE BEAM 12°-45° 3F MULTI ADAPTER INCL.LED POWER SUPPLY 500mA-DC

Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	II
POWER SUPPLY	YES
DIM TYPE	DALI
ENERGY CLASS	D
CERTIFICATES	CB, EAC, ENEC, RCM

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 17,2W / CRI>90 (R9: 52) / 3000K / 2101lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	12°-45°
LED TECHNICS (LIGHT SOURCE)	2101lm // 17,2W // 123lm/W
LED TECHNICS (LUMINAIRE)	735lm // 19,8W // 37lm/W

Requirements	
TRACK 3F DIM	

For detailed installation instructions, please consult the manual : [19875_XXX5_HAND.pdf](#)

DELTALIGHT

SPY FOCUS MP 930 ADM DIM5

19875 9305 FW

COMPATIBLE TRACKS

TRACK 3F DIM H			Available Colours
200 14 410	TRACK 3F DIM H 1m	1000 m 1.6 kg	 
200 14 420	TRACK 3F DIM H 2m	2000 m 3.2 kg	 
200 14 430	TRACK 3F DIM H 3m	3000 m 4.8 kg	 
TRACK 3F DIM IN			Available Colours
200 13 410	TRACK 3F DIM IN 1m	1000 m 1.2 kg	 
200 13 420	TRACK 3F DIM IN 2m	2000 m 2.4 kg	 
200 13 430	TRACK 3F DIM IN 3m	3000 m 3.5 kg	 
TRACK 3F DIM ON			Available Colours
200 12 410	TRACK 3F DIM ON 1m	1000 m 1.1 kg	  
200 12 420	TRACK 3F DIM ON 2m	2000 m 2.1 kg	  
200 12 430	TRACK 3F DIM ON 3m	3000 m 3.1 kg	  

Notes: